


MZ40X2751DPFIR-T



3MEGA PIXEL

Type	AI ZOOM		Mount	C	2/3"
Focal Length	27~1070mm		Back Focus	41.44mm	
Fno.	F5.1		Flange Back	17.53mm	
Designed Image Format	2/3"(6.6x8.8mm)		Exit Pupil	-236.7mm	
Operation Range	Iris	F5.1-Close	Filter Size	M112 P=1	
	Focus	5.0m ~ infinity	Aperture	Front	ø86.7
	Zoom	27~1070mm		Rear	ø15.4 -
Control	Iris	DC Galvanometer	Dimension	128.6x125.6x347.1mm	C
	Focus	DC Motor	Weight	5000g	
	Zoom	DC Motor			
Object Size at MOD	Wide	1475x1106mm	1206.0x904.3mm		
	Tele	42.7x32.0mm	34.9x26.2mm		
Field of View	D	2/3" 21.6°~0.63°	1/1.8" 17.7°~0.52° (4:3) 10.7°~0.31°	1/1.8" 17.7°~0.52° (16:9) 8.7°~0.25°	
	H	(4:3) 17.3°~0.50°			
	V	13.0°~0.38°			
Control	Iris		Focus	Zoom	
Driving Coil/Supply Volt.	194Ω		DC 12V	DC 12V	
Damping Coil/Current	1173Ω		60mA or less	60mA or less	
Response Time	-		-	-	
Potentiometer	-		-	-	
Light Measuring Method	-		-	-	
Input Signal	-		-	-	
Iris Accuracy	-		-	-	
Sensitivity Adjustment	-		-	-	
Operating Temperature	-10 ~ +50 degree C		-	-	DP

DIMENSIONS

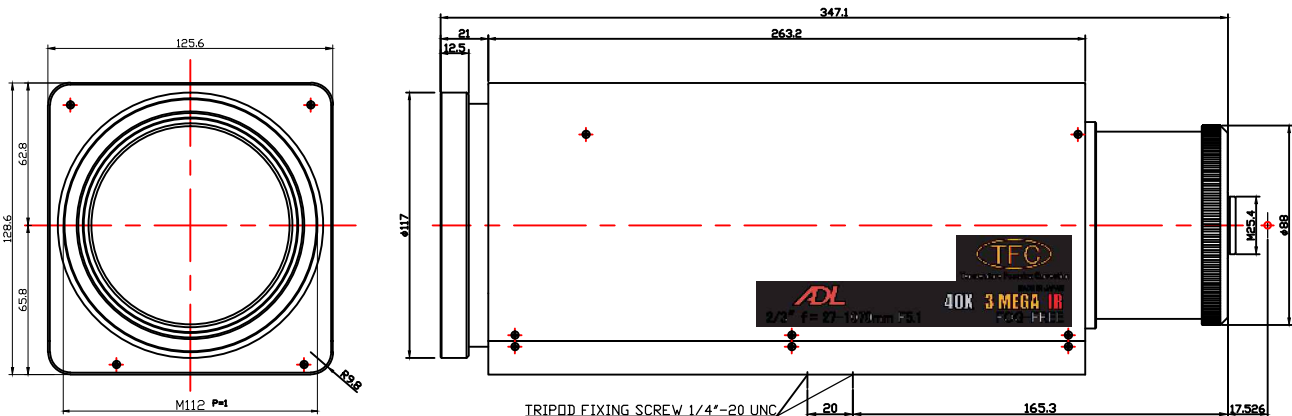


CABLE CONNECTION

IRIS

4 - PIN PLUG

- ① (-) DAMPING COIL
- ② (+) DAMPING COIL
- ③ (+) DRIVING COIL
- ④ (-) DRIVING COIL

4 Pin Standard Connector
for Auto Iris



DRIVE

HDAB-15P

- ① FOCUS (+) FAR
- ② FOCUS (-)
- ③ ZOOM (+) WIDE
- ④ ZOOM (-)
- ⑤ Filter(+)Dummy
- ⑥ Filter(-)Visible Cut
- ⑦
- ⑧
- ⑨
- ⑩ LENS POT(+)
- ⑪ FOCUS POT WIP
- ⑫ ZOOM POT WIP
- ⑬ LENS POT(-)
- ⑭ Temperature Focusing Correction (+)
- ⑮ Temperature Focusing Correction (-)